



XH130 NEO

**DEEP INDENTING
HYDRAULIC HEAD**



> Identical force, stroke and capacities as the hand tool **H130** and as the battery operated tool **BPP130U**.

- HEAD ACCORDING TO HN 68-S-90** (> EDF specifications) For underground lines (bimetallic lugs and sleeves).
- MAX. PASSAGE OF 34 mm** In the head for large sections.
- MECHANICAL STOP (NEW FEATURE)** The piston stops at stroke end.

DEEP INDENTING
16 > 240 mm²
HEXAGONAL CRIMPING
6 > 400 mm²



STROKE	26 mm
MAX. PASSAGE	34 mm
FORCE	130 kN
DIMENSIONS (L x l x h in mm)	205 x 80 x 80
WEIGHT	3,600 kg



**ASSEMBLY No 1
FOR INDENTING APPLICATIONS**



DIE SETS
> Refer to **PAGES 96**.



**ASSEMBLY No 2
FOR CRIMPING APPLICATIONS**

130 kN crimping die sets can be used in this tool thanks to the adapter **A12D2**.

DIE SETS
> Refer to **PAGES 89 – 95**.

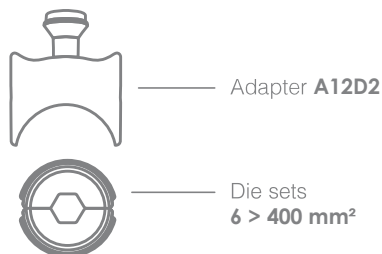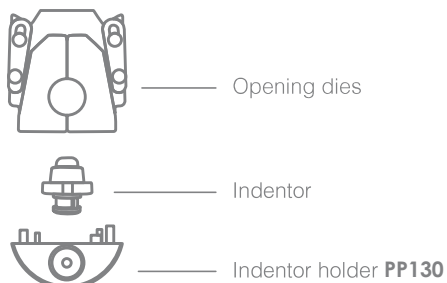

> Common interchangeable die sets for **H130**, **XH130** & **BPP130U** tools.



DIMENSIONS (mm)	405 x 270 x 105
WEIGHT	3,120 kg

> Delivered separately.