



NEOELEC™
BPP130U

DEEP INDENTING HYDRAULIC TOOL
 OPERATED ON BATTERY

18V
 4Ah

> Identical force, stroke and capacities as the H130 & XH130.

- HEAD ACCORDING TO HN 68-S-90** (> EDF specifications)
 For underground lines (bimetallic lugs and sleeves).
- MAX. PASSAGE OF 34 mm**
 In the head for large sections.
- MECHANICAL STOP (NEW FEATURE)**
 The piston stops at stroke end.
- ROTATIVE HEAD**
 270°

DEEP INDENTING
 16 > 240 mm²
HEXAGONAL CRIMPING
 6 > 400 mm²



STROKE	26 mm
MAX. PASSAGE	34 mm
FORCE	130 kN
DIMENSIONS (L x l x h in mm)	415 x 75 x 310
WEIGHT (with battery)	6,300 kg



ASSEMBLY No 1
 FOR INDENTING APPLICATION



> Refer to **PAGES 96**.



ASSEMBLY No 2
 FOR CRIMPING APPLICATION

130 kN crimping die sets can be used in this tool thanks to the adapter A12D2.

> Refer to **PAGES 89 – 95**.

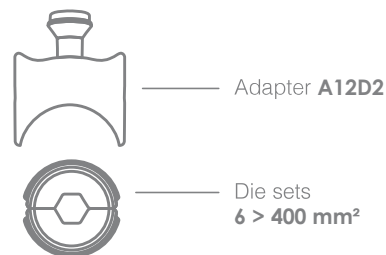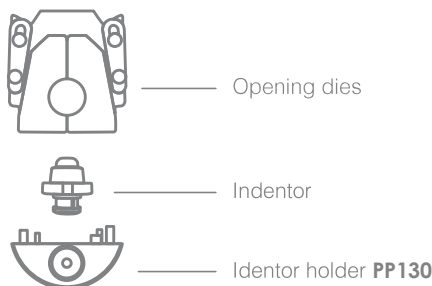

> Common interchangeable indentor and opening dies for H130, XH130 & BPP130U.

> Case and charger delivered with the tool.
 > **NEOELEC™** accessories
 Refer to **PAGE 56 – 57**.